



# SENTRY-PRO POWER SYSTEMS

By Gillette Generators, Inc.

MODEL  
**SPJD-520**  
60 HERTZ


**LIQUID COOLED DIESEL ENGINE GENERATOR SET**

**KW POWER RATINGS RANGE FOR 60 HZ**


Model	HZ	STANDBY	PRIME
		130°C RISE	105°C RISE
<b>SPJD-520-60 HERTZ</b>	60	50/52	42/44

**STANDARD FEATURES**


- All generator sets are USA prototype built and thoroughly tested. Production models are USA factory built and 100% load tested.
- All generator sets will accept 100% rated load in one step, per NFPA-110.
- All generators are UL-1446 certified. Certain generators are UL-2200 certified.
- Solid state, frequency compensated voltage regulation is standard on all gen-sets.
- Electronic engine governor for precise isochronous frequency regulation.
- SENTINEL "COMMAND" digital controller allows programming to basic engine functions in the field. Controller has stop-manual-auto mode and engine shutdowns, signaled by full text LCD indicators.
- All generator set control systems components and accessories provide a 1-year limited warranty at time of initial start-up. Generators and engines are governed by separate warranties.
- "OPEN" Generator Sets: There is no enclosure, so gen-set must be placed within a weather protected area, un-inhabited by humans or animals, with proper ventilation. Muffler and flexible exhaust hose are not supplied, as installation requirements are not known. However, these two items are available as optional equipment.
- "STANDARD" Housing: Full weather protection and above average sound attenuation for normal applications. Residential grade muffler is standard.
- "SUPER-SILENT" Housing: Full weather protection and superior sound attenuation for specific low noise applications. Critical grade muffler is standard..

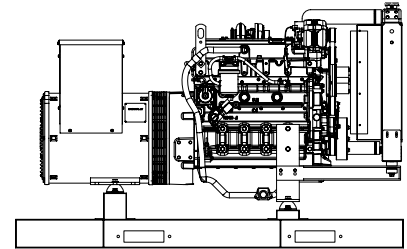

"OPEN" GEN-SET

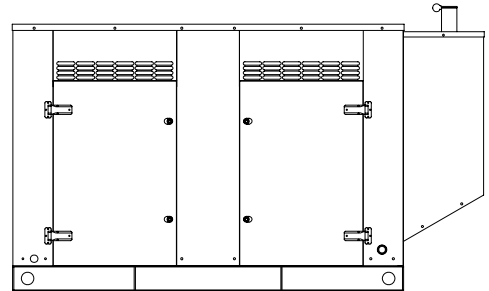

"STANDARD" HOUSED GEN- SET

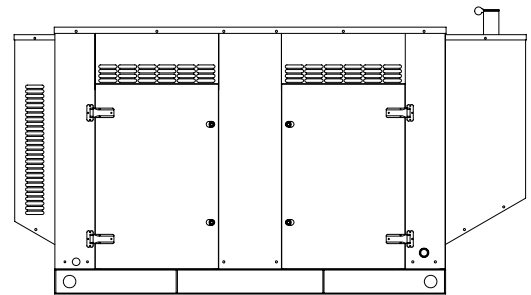

"SUPER-SILENT" HOUSED GEN-SET

**GENERATOR RATINGS**

GENERATOR MODEL	VOLTAGE		PH	HZ	130°C RISE STANDBY RATING		105°C RISE PRIME RATING		POWER LEAD CONNECTIONS
	L-N	L-L			KW/KVA	AMP	KW/KVA	AMP	
	SPJD-520-1-1	120			240	1	60	50/50	
SPJD-520-3-2	120	208	3	60	52/65	181	44/55	153	12 LEAD LOW WYE
SPJD-520-3-3	120	240	3	60	52/65	156	44/55	132	12 LEAD HIGH DELTA
SPJD-520-3-4	277	480	3	60	52/65	78	44/55	66	12 LEAD HIGH WYE
SPJD-520-3-5	127	220	3	60	52/65	171	44/55	145	12 LEAD LOW WYE

RATINGS: All single phase gen-sets are dedicated 4 lead windings, rated at unity (1.0) power factor. All three phase gen-sets are 12 lead windings, rated at .8 power factor. 130° C "STANDBY RATINGS" are strictly for gen-sets that are used for back-up emergency power to a failed normal utility power source. This standby rating allows varying loads, with no overload capability, for the entire duration of utility power outage. 105° C "PRIME RATINGS" are strictly for gen-sets that provide the prime source of electric power, where normal utility power is unavailable or unreliable. A 10% overload is allowed for a total of 1 hour, within every 12 hours of operation, on every PRIME RATED systems. All gen-set power ratings are based on temperature rise measured by resistance method as defined by MIL-STD 705C and IEEE STD 115, METHOD 6.4.4. All generators have class H (180°C) insulation system on both rotor and stator windings. All factory tests and KW/KVA charts shown above are based 130°C (standby), and 105°C (prime) R/R winding temperature, within a maximum 30°C ambient condition. Generators operated at standby power ratings must not exceed the temperature rise limitation for class H insulation system, as specified in NEMA MG1-22.40. Specifications & ratings are subject to change without prior notice.



# APPLICATION AND ENGINEERING DATA FOR MODEL SPJD-520-60 HZ

## COOLING SYSTEM

Type of System .....	Pressurized, closed recovery
Coolant Pump .....	Pre-lubricated, self-sealing
Cooling Fan Type (no. of blades) .....	Pusher (7)
Fan Diameter inches (cm) .....	20" (50.8)
Ambient Capacity of Radiator °F (°C).....	125 (52)
Engine Jacket Coolant Capacity Gal (L).....	3.5 (13.2)
Radiator Coolant Capacity Gal. (L) .....	9.49 (8.98)
Engine Heat Rejection, Btu/min (kw) .....	2265 (40)
Water Pump Capacity gpm (L/min).....	27 (104)
Heat Reject Coolant: Btu/min (kw) .....	2265 (40)
Low Radiator Coolant Level Shutdown.....	Standard
Note: Coolant temp. shut-down switch setting at 212°F (100°C) with 50/50 (water/antifreeze) mix.	

## COOLING AIR REQUIREMENTS

Combustion Air cfm (m <sup>3</sup> /min) .....	152 (4.3)
Max. Air Intake Restrictions:	
Clean Air Cleaner, H <sub>2</sub> O (kpa).....	12 (3)
Intake Manifold Pressure, Psi (kpa).....	22 (155)
Max. Allowable Temp. Rise, Amb:	
Air to Engine Inlet, °F (°C).....	15 (8)
Radiator Cooling Air, SCFM (m <sup>3</sup> /min).....	3400 (96)

## EXHAUST SYSTEM

Muffler Inlet – Outlet Size .....	2.5"
Max. Back Pressure in H <sub>2</sub> O (kpa).....	30 (7.5)
Exhaust Flow, at rated KW, cfm (m <sup>3</sup> /min) ...	448 (12.7)
Exhaust Temp, at rated KW, °F (°C).....	1020 (549)

## SOUND LEVELS

	Open Set	Std. Encl.	Super-Silent Encl.
dB(A), Residential Muffler, no load .....	81	77	n/a
dB(A), Residential Muffler, full load.....	83	80	n/a
dB(A), Critical Muffler, no load .....	79	76	72
dB(A), Critical Muffler, full load.....	81	79	74

Note: Open sets (no enclosure) has no furnished muffler system due to unknown job-site applications. Standard enclosure has installed residential muffler. Super-Silent enclosure has installed critical muffler. Standard enclosure sets can be upgraded from residential to critical muffler. Sound tests are averaged from several test points and taken at 23 ft. (7 m) from source of noise

## DERATE GENERATOR FOR ALTITUDE

3% per 1000 ft. (305m) above 3000 ft. (914m) from sea level

## DERATE GENERATOR FOR TEMPERATURE

2% per 10°F (5.6°C) above 85°F (29.4°C)

## DIMENSIONS AND WEIGHTS

	Open Set	Standard Enclosure	Super-Silent Enclosure
Length in (cm).....	78 (198)	94 (239)	102 (259)
Width in (cm).....	42 (107)	42 (107)	42 (107)
Height in (cm) .....	49 (124)	53 (135)	53 (135)
1 Ø Net Weight lbs (kg) ..	1519 (689)	1999 (907)	2179 (988)
1 Ø Ship Weight lbs (kg) ..	1619 (734)	2129 (966)	2339 (1061)
3 Ø Net Weight lbs (kg) ..	1510 (685)	1990 (902)	2170 (984)
3 Ø Ship Weight lbs (kg) ..	1610 (730)	2120 (962)	2330 (1057)

# SENTINEL COMMAND DIGITAL MICROPROCESSOR CONTROLLER



### SENTINEL COMMAND

The “Command” controller is an auto start control module and the upgrade “Command Elite” controller is an auto mains (utility) failure, module, for single gen-set applications.

Both controllers include a backlit LCD display which continuously displays the status of engine and generator at all times. Both will also monitor speed, frequency, voltage, current, oil pressure, coolant temp., and fuel levels. These modules have been designed to display warning and shut down status. They also include: (6) digital inputs • (3) analog inputs • (6) outputs • voltage monitoring (utility mains included on “Command Elite”) • (10) event logs • configurable timers • automatic shutdown or warning during fault detection via red LED indicators • remote start (on or off load) • engine preheat • advanced metering capability • hour meter • text LCD displays • protected solid state outputs • test buttons for: stop/reset • manual mode • auto mode • lamp test • start button.

This controller (installed on all generator models as standard equipment) can be accessed via PC laptop using any standard USB cable and downloadable software.



### SENTINEL COMMAND ELITE CONTROLLERS :

The “Command Elite” controller is an auto-mains (utility) failure control module that has almost all the Sentinel “Command” controller features, plus the additional capability of

being able to monitor a mains (utility) power supply. It is also used where remote annunciation is required.

All controllers are simple to operate and feature a user friendly menu layout for improved clarity. Enhanced features include a real time clock, better event, and performance monitoring, plus Ethernet communications for lower cost monitoring.

# STANDARD AND OPTIONAL FEATURES FOR MODEL SPJD-520-60 HZ

## STANDARD FEATURES

### CONTROL PANEL:

SENTINEL "COMMAND" digital microprocessor with logic allows programming in the field. Controller has:

- STOP-MANUAL-AUTO modes and automatic engine shutdowns, signaled by full text LCD indicators:
- Low oil pressure                      • Engine fail to start
- High engine temp                      • Engine over speed
- Low Radiator Level                      • Engine under speed
- Three auxiliary alarms                      • Over & under voltage
- Battery fail alarm

Also included is tamper-proof engine hour meter

### ENGINE:

Full flow oil filter • Air filter • Oil pump • Solenoid type starter motor • Hi-temp radiator • Jacket water pump

- Thermostat • Pusher fan and guard • Exhaust manifold
- Residential Silencer • 12 VDC battery charging alternator
- Flexible exhaust connector • "Isochronous" duty, electronic governor • Secondary dry fuel regulator • Dry fuel lock-off solenoid • Vibration isolators • Closed coolant recovery system with 50/50 water to anti-freeze mixture

### GENERATOR:

AC generator • Shunt excited • Brushless design • Single bearing • Direct connection to engine with flex disc • Class H, 180°C insulation • Self ventilated • Drip proof construction

### VOLTAGE REGULATOR:

½% Voltage regulation • EMI filter • Under-speed protection • Over-excitation protection • total encapsulation

### ELECTRICAL:

Battery tray • Battery cables • Battery hold down straps


- 2-stage battery float charger

### WEATHER/SOUND PROOF STEEL HOUSING CORROSION RESISTANT PROTECTION CONSISTING OF:

- 9 Heated And Agitated Wash Stages.
- Zinc Phosphate Etching-coating Stage
- E-Coat: Electrostatic Emerging
- Final Baked On Enamel Powder Coat

## ACCESSORY ITEMS

- Engine Coolant Heater with automatic 60°F on, 80°F off, thermostat
- Starting Battery Heater Blanket with automatic 60°F on, 80°F off, thermostat
- Battery Charger, float type, 12 VDC at max. charge, with ammeter.
- External Permanent Magnet Generator (PMG) for increased induction motor starting capacity on 1Ø or 3 Ø sets, and to meet NFPA-110 requirements.
- Exhaust Silencer (Critical Grade) installed on "OPEN" sets or standard housing.
- Circuit Breaker installed and wired on gen-set. Note: NEMA-3R Breakers are shipped loose.
- All aluminum or stainless steel weather and sound deadening housing for coastal areas.
- SENTINEL COMMAND ELITE Controller with all features of Sentinel COMMAND, plus allowing full telemetry remote control annunciation, and utility power monitoring.
- Remote Annunciator for up to (10) reporting functions. An additional relay expansion module, plus a second Annunciator adds another (10) reporting functions. Note: SENTINEL COMMAND ELITE must be selected, to achieve remote annunciation.

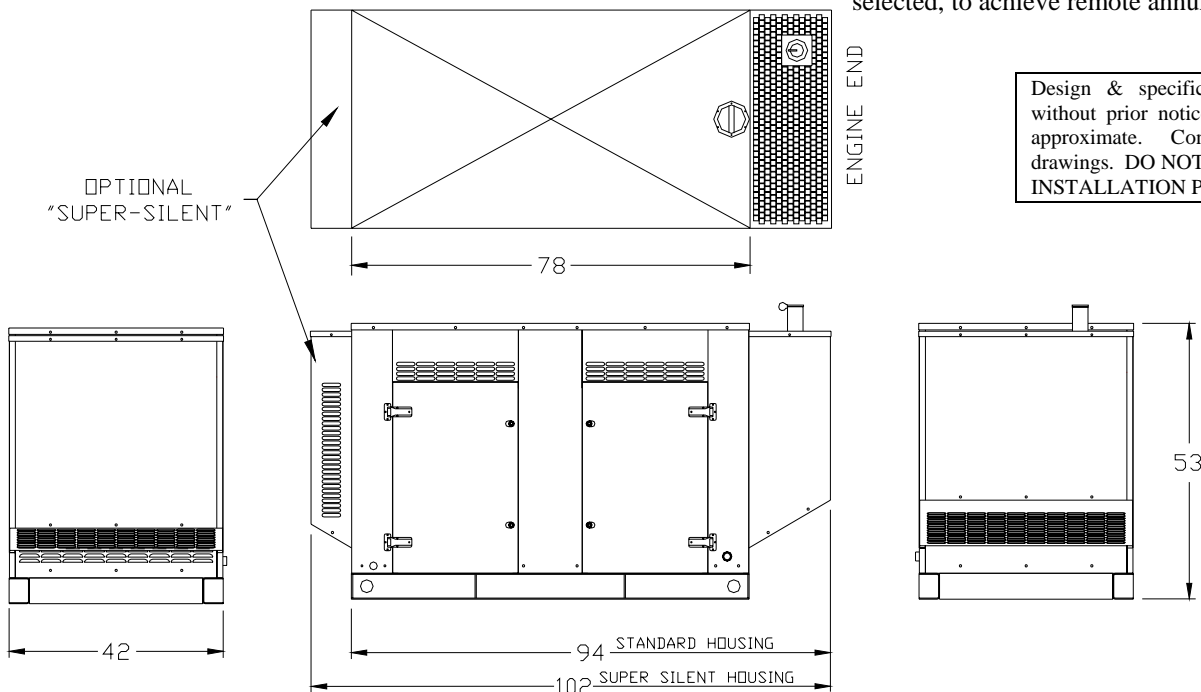

Design & specifications subject to change without prior notice. Dimensions shown are approximate. Contact Gillette for certified drawings. DO NOT USE DIMENSIONS FOR INSTALLATION PURPOSES.