



SENTRY-PRO POWER SYSTEMS


By Gillette Generators, Inc.

MODEL
SPJD-1050

LIQUID COOLED DIESEL ENGINE GENERATOR SET

KW POWER RATINGS RANGE


Model	HZ	MAXIMUM	STANDBY	PRIME
		150°C RISE	125°C RISE	105°C RISE
SPJD-1050	60	105	100	90
	50	85	81	75

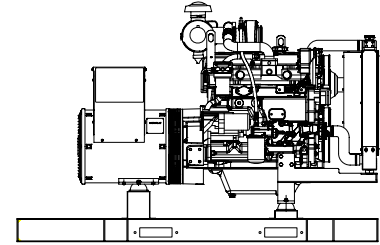


“OPEN” GEN-SET

STANDARD FEATURES

- All generator sets are USA prototype built and thoroughly tested. Production models are USA factory built and 100% load tested.
- All generator sets will accept 100% rated load in one step, per NFPA-110.
- All generators are UL-1446 certified. Certain generators are UL 2200 certified.
- Solid state, frequency compensated voltage regulation is standard on all gen-sets.
- Electronic engine governor for precise isochronous frequency regulation .
- SENTINEL “SCOUT” digital controller allows programming to basic engine functions in the field. Controller has stop-manual-auto mode and (8) basic protectors and the functions monitored by LED indicators, plus LCD hour meter.
- All generator set control systems components and accessories provide a 1-year limited warranty at time of initial start-up. Generators and engines are governed by separate warranties.
- “OPEN” Generator Sets: There is no enclosure, so gen-set must be placed within a weather protected area, un-inhabited by humans or animals, with proper ventilation. Muffler and flexible exhaust hose are supplied loose for final exhaust installation by others.
- “STANDARD” Housing: Full weather protection and above average sound attenuation for normal applications. Residential grade muffler is standard.
- “SUPER-SILENT” Housing: Full weather protection and superior sound attenuation for specific low noise applications. Critical grade muffler is standard.

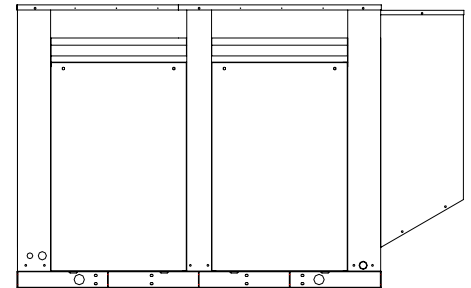

“STANDARD” HOUSED GEN- SET

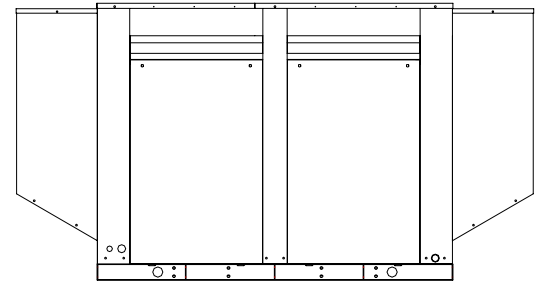

“SUPER-SILENT” HOUSED GEN-SET

GENERATOR RATINGS

GENERATOR MODEL	VOLTAGE		PH	HZ	150°C RISE MAXIMUM RATING		125°C RISE STANDBY RATING		105°C RISE PRIME RATING		POWER LEAD CONNECTIONS
	L-N	L-L			KW/KVA	AMP	KW/KVA	AMP	KW/KVA	AMP	
SPJD-1050-1-1	120	240	1	60	105/105	437	100/100	417	90/90	375	4 LEAD DEDICATED 1 PH
SPJD-1050-3-2	120	208	3	60	105/131	365	100/125	347	90/112.5	313	12 LEAD LOW WYE
SPJD-1050-3-3	120	240	3	60	105/131	316	100/125	301	90/112.5	271	12 LEAD HIGH DELTA
SPJD-1050-3-4	277	480	3	60	105/131	158	100/125	151	90/112.5	135	12 LEAD HIGH WYE
SPJD-1050-3-5	127	220	3	60	105/131	345	100/125	328	90/112.5	295	12 LEAD LOW WYE
SPJD-1050-1-6-5	110	220	1	50	85/85	386	81/81	368	75/75	341	4 LEAD DEDICATED 1 PH
SPJD-1050-3-7-5	110	220	3	50	85/106	279	81/101	266	75/93.8	246	12 LEAD HIGH DELTA
SPJD-1050-3-8-5	219	380	3	50	85/106	162	81/101	154	75/93.8	142	12 LEAD HIGH WYE
SPJD-1050-3-9-5	240	415	3	50	85/106	148	81/101	141	75/93.8	130	12 LEAD HIGH WYE
SPJD-1050-3-10-5	231	400	3	50	85/106	153	81/101	146	75/93.8	135	12 LEAD HIGH WYE

RATINGS: All single phase gen-sets are rated at unity (1.0) power factor. All three phase gen-sets are rated at .8 power factor. “MAXIMUM RATINGS” are for short period running, not exceeding 1 hour, out of every 24 hour period. “STANDBY RATINGS” are strictly for gen-sets that are used for back-up emergency power to a failed normal utility power source. This standby rating allows varying loads, with no overload capability, for the entire duration of utility power outage. “PRIME RATINGS” are strictly for gen-sets that provide the prime source of electric power, where normal utility power is unavailable or unreliable. A 10% overload is allowed for a total of 1 hour, within every 12 hours of operation on PRIME RATED systems. All gen-set power ratings are based on temperature rise measured by resistance method as defined by MIL-STD 705C and IEEE STD 115, METHOD 6.4.4. All generators have class H (180°C) insulation system on both rotor and stator windings. All factory tests and KW/KVA charts shown above are based on 150°C (maximum), 125°C (standby), and 105°C (prime) R/R winding temperature, within a maximum 35°C ambient condition. Generators operated at maximum power ratings will not exceed the temperature rise limitation for class H insulation system, as specified in NEMA MG1-22.40. Specifications & ratings are subject to change without prior notice.

APPLICATION AND ENGINEERING DATA FOR MODEL SPJD-1050

COOLING SYSTEM

Type of System Air to Air, Charged air cooler
 Coolant PumpPre-lubricated, self-sealing
 Cooling Fan Type (no. of blades)Pusher (7)
 Fan Diameter inches (cm)..... 22" (55.9)
 Ambient Capacity of Radiator °F (°C)..... 125 (51.6)
 Engine Jacket Coolant Capacity Qt. (L) 13.0 (11.9)
 Radiator Coolant Capacity Qt. (L).....8.78 (8.31)
 Engine Heat Reject. Btu/min (kw) 3544(62)
Speed1800 rpm 1500 rpm
Frequency60 HZ50 HZ
 Water Pump Capacity gpm (L/min)..... 38 (144)..... 32 (125)
 Heat Reject Coolant: Btu/min (kw) 3544 (62).....3190 (56)
 Air to Air Heat Reject Btu/min (kw)...1127 (19.8)..... 1014(17.8)
 Note: Coolant temp. shut-down switch setting at 212°F (100°C) with 50/50 (water/antifreeze) mix.

AIR REQUIREMENTS

Speed1800 rpm 1500 rpm
Frequency60 HZ50 HZ
 Engine Air Flow cfm (m³/min) 304 (8.6)..... 258 (73)
 Max. Air Intake Restriction:
 Clean Air Cleaner, H₂O 15 (3.75)... 15 (3.75)
 Intake Manifold Pressure, Psi (kpa)..... 24 (165)..... 22 (148)
 Max. Allowance Temp. Rise Amb:
 Air to Engine Inlet °F (°C)15 (8)13 (7)
 Max. Temp. out of Charged Air Cooler:
 @77° F (25°C) Amb. Air, °F (°C) ..140 (60)119 (51)

EXHAUST SYSTEM

Muffler Inlet – Outlet SizeDual mufflers @ 2.5"
 Max. Back Pressure in H₂O (kpa)30 (7.5)
Speed1800 rpm 1500 rpm
Frequency60 HZ50 HZ
 Exhaust Flow, cfm (m³/min)..... 805 (23.8)..... 725 (20.5)
 Exhaust Temp, °F (°C)..... 1076 (580).....968 (522)

SOUND LEVELS

	<u>Open Set</u>	<u>Std. Encl.</u>	<u>Super-Silent Encl.</u>
dB(A), Residential Muffler, no load	89	86	n/a
dB(A), Residential Muffler, full load.....	91	88	n/a
dB(A), Critical Muffler, no load	86	84	81
dB(A), Critical Muffler, full load.....	88	86	83

Note: Open sets (no enclosure) has loose flexible exhaust hose and loose residential muffler, ready for installation by others. Standard enclosure has installed residential muffler. Super-Silent enclosure has installed critical muffler. "OPEN" sets can be upgraded or critical muffler. Standard enclosure sets can be upgraded to critical muffler. Reduce all sound levels by 5% for 50 HZ, 1500 RPM operation. Sound tests are taken at 23 ft. (7 m) from source of noise.

DERATE GENERATOR FOR ALTITUDE

3% per 1000 ft. (305m) above 3000 ft. (914m) from sea level


DERATE GENERATOR FOR TEMPERATURE

2% per 10°F (5.6°C) above 85°F (29.4°C)

DIMENSIONS AND WEIGHTS

	<u>Open Set</u>	<u>Standard Enclosure</u>	<u>Super-Silent Enclosure</u>
Length in (cm).....	88 (224).....	108 (274).....	128 (325)
Width in (cm).....	48 (122).....	48 (122).....	48 (122)
Height in (cm).....	50 (127).....	68 (173).....	68 (173)
Net Weight lbs (kg).....	2650 (1202).	3000 (1361) ..	3100 (1406)
Ship Weight lbs (kg).....	2800 (1270).	3150 (1429) ..	3250 (1474)

SENTINEL SCOUT DIGITAL MICROPROCESSOR CONTROLLER

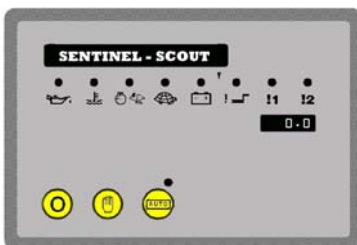

SENTINEL SCOUT

This flexible controller allows programming to 8 basic engine functions in the field, and is standard equipment on all 4-pole gen-sets.

Controller has STOP-MANUAL-AUTO mode and (8) basic engine LED indicators: Low oil pressure • High engine temp • Over speed • Under speed • Fail to start • Battery charge fail • and two auxiliary LED outputs.

SPECIAL FEATURES : Micro-processor design • Auto engine stop-start with (3) start attempts before final shutdown • Auto shutdown on fault condition • Push button operation • Adjustable start or stop delay timer • Energize to stop timer • Pre-heat timer • LED alarm indication • External remote start input • Load switch output capability • Solid state fuel and engine crank outputs • Tamper-proof engine hours LCD counter



SENTINEL III UPGRADE :

Digital controller with (47) different reporting functions programmable by means of graphic LCD display.



SENTINEL IV UPGRADE:

This controller is the same as the SENTINEL III, plus: monitors utility power • Communication via optional RS-232 port. Use this controller with remote annunciators.

STANDARD AND OPTIONAL FEATURES FOR MODEL SPJD-1050

STANDARD FEATURES

CONTROL PANEL:

- SENTINEL "SCOUT" digital microprocessor with logic allows programming in the field. Controller has:
 - STOP-MANUAL-AUTO modes and (8) basic engine LED indicators
 - Low oil pressure
 - High engine temp
 - Engine over speed
 - Engine under speed
 - Engine fail to start
 - Battery charge fail
 - Two auxiliary LED outputs
- Also included is tamper-proof engine hour meter.

ENGINE:

- Fuel filter • Full flow oil filter • Air filter • Fuel pump • Oil pump • Solenoid type starter motor • Hi-temp radiator
- Jacket water pump • Thermostat • Pusher fan and guard
- Exhaust manifold • Residential Silencer • Electronic Governor • 12 VDC battery charging alternator • Flexible fuel and exhaust connectors • Vibration isolators
- Open coolant recovery system with 50/50 water to anti-freeze mixture • flexible oil and radiator drain hose

GENERATOR:

- AC generator • Internal PMG excited on 3 \emptyset sets, shunt winding excited on 1 \emptyset • Brushless design • Single bearing
- Direct connection to engine with flex disc • Class H, 180°C insulation • Self ventilated • Drip proof construction

VOLTAGE REGULATOR:

- 1% Voltage regulation • EMI filter • Under-speed protection • Over-excitation protection • Total encapsulation

ELECTRICAL:





- Battery tray • Battery cables • Battery hold down straps
- 2-stage battery float charger

SUPPORT:

- Operation, maintenance, and installation literature.
- Call 1-800-777-9639 or Fax 1-574-262-1840
- E-mail : engineering@gillettegenerators.com
- Web : www.gillettegenerators.com

ACCESSORY ITEMS

- Engine Coolant Heater with automatic 60°F on, 80°F off, thermostat
- Starting Battery Heater Blanket with automatic 60°F on, 80°F off, thermostat
- Battery Charger, float type, 12 VDC at max. charge, with ammeter.
- Radiator for dirty environment
- External Permanent Magnet Generator (PMG) for increased induction motor starting capacity, on 1 \emptyset or 3 \emptyset sets, and to meet NFPA-110 requirements.
- Exhaust Silencer (Critical Grade) installed on "OPEN" sets or standard housing.
- Circuit Breaker installed and wired on gen-set.
- Circuit Breaker with NEMA-3R Enclosure. Note: These breakers are shipped loose for installation in remote outside area by others.
- SENTINEL III digital programmable controller with up to (47) different reporting functions
- SENTINEL IV Controller with all features of Sentinel III, plus allowing full telemetry remote control annunciation, and utility power monitoring.
- Remote annunciator for up to (10) reporting functions. An additional relay expansion module, plus a second annunciator adds another (10) reporting functions. Note: SENTINEL IV must be selected, to achieve remote annunciation.
- All aluminum weather and sound deadening housing for coastal areas. (allow 8-10 weeks for special order)
- Double-Wall Sub-Base Diesel Fuel Tanks with UL-142 certification.

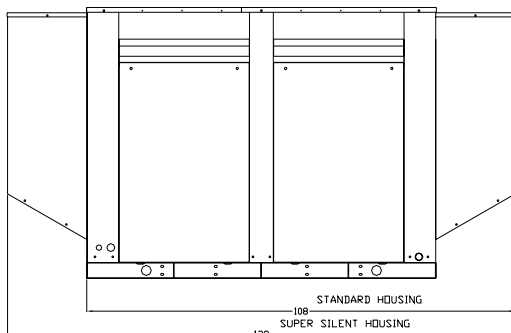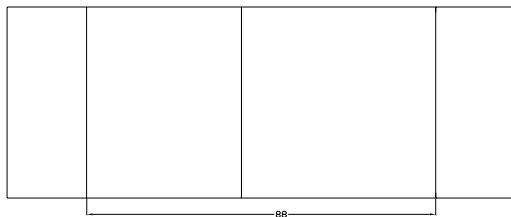

Design & specifications subject to change without prior notice. Dimensions shown are approximate. Contact Gillette for certified drawings.
DO NOT USE DIMENSIONS FOR INSTALLATION PURPOSES.