

SENTRY-PRO POWER SYSTEMS

By Gillette Generators, Inc.

LIQUID COOLED DIESEL ENGINE GENERATOR SET


MODEL
SPLD-150
60 HERTZ

KW POWER RATINGS RANGE FOR 60 HZ


Model	HZ	STANDBY	PRIME
		130°C RISE	105°C RISE
SPLD-150-60 HERTZ	60	15	11

STANDARD FEATURES


- All generator sets are USA prototype built and thoroughly tested. Production models are USA factory built and 100% load tested.
- All generator sets will accept 100% rated load in one step, per NFPA-110.
- All generators are UL-1446 certified. Certain generators are UL-2200 certified.
- Solid state, frequency compensated voltage regulation is standard on all gen-sets.
- A brushless rotating field generator design with shunt wound excitation system and connectable at 1 phase or a broad range of 3 phase voltages.
- SENTINEL "COMMAND" digital controller allows programming to basic engine functions in the field. Controller has stop-manual-auto mode and engine shutdowns, signaled by full text LCD indicators.
- The rugged diesel engine is capable of delivering rated power at 1800 RPM (60 HZ).
- All generator set control systems components and accessories provide a 1-year limited warranty at time of initial start-up. Generators and engines are governed by separate warranties.
- "OPEN" Generator Sets: There is no enclosure, so gen-set must be placed within a weather protected area, un-inhabited by humans or animals, with proper ventilation. Muffler and flexible exhaust hose are supplied loose for final exhaust installation by others.
- "STANDARD" Housing: Full weather protection and above average sound attenuation for normal applications. Residential grade muffler is standard.
- "SUPER-SILENT" Housing: Full weather protection and superior sound attenuation for specific low noise applications. Critical grade muffler is standard.

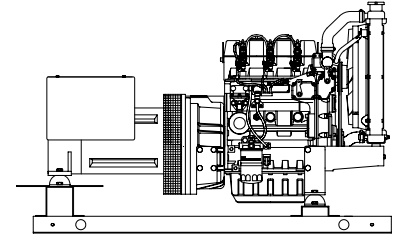

"OPEN" GEN-SET

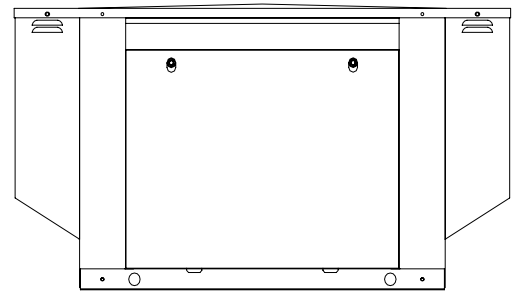

"STANDARD" HOUSED GEN- SET

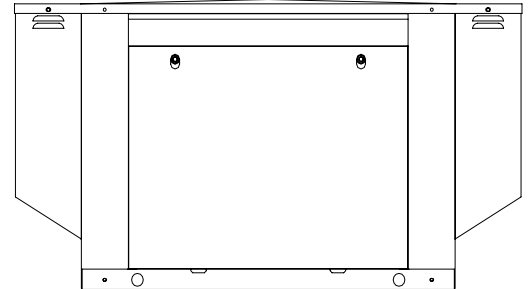

"SUPER-SILENT" HOUSED GEN-SET

GENERATOR RATINGS

GENERATOR MODEL	VOLTAGE		PH	HZ	130°C RISE STANDBY RATING		105°C RISE PRIME RATING		POWER LEAD CONNECTIONS
	L-N	L-L			KW/KVA	AMP	KW/KVA	AMP	
SPLD-150-1-1	120	240	1	60	15/15	63	11/11	46	4 LEAD DEDICATED 1 PH
SPLD-150-3-2	120	208	3	60	15/18.8	52	11/13.8	38	12 LEAD LOW WYE
SPLD-150-3-3	120	240	3	60	15/18.8	45	11/13.8	33	12 LEAD HIGH DELTA
SPLD-150-3-4	277	480	3	60	15/18.8	23	11/13.8	17	12 LEAD HIGH WYE
SPLD-150-3-5	127	220	3	60	15/18.8	49	11/13.8	36	12 LEAD LOW WYE

RATINGS: All single phase gen-sets are rated at unity (1.0) power factor. All three phase gen-sets are rated at .8 power factor. 130° C "STANDBY RATINGS" are strictly for gen-sets that are used for back-up emergency power to a failed normal utility power source. This standby rating allows varying loads, with no overload capability, for the entire duration of utility power outage. 105° C "PRIME RATINGS" are strictly for gen-sets that provide the prime source of electric power, where normal utility power is unavailable or unreliable. A 10% overload is allowed for a total of 1 hour, within every 12 hours of operation, on every PRIME RATED systems. All gen-set power ratings are based on temperature rise measured by resistance method as defined by MIL-STD 705C and IEEE STD 115, METHOD 6.4.4. All generators have class H (180°C) insulation system on both rotor and stator windings. All factory tests and KW/KVA charts shown above are based 130°C (standby), and 105°C (prime) R/R winding temperature, within a maximum 30°C ambient condition. Generators operated at standby power ratings must not exceed the temperature rise limitation for class H insulation system, as specified in NEMA MG1-22.40. Specifications & ratings are subject to change without prior notice.

APPLICATION AND ENGINEERING DATA FOR MODEL SPLD-150-60 HZ

GENERATOR SPECIFICATIONS

Type 4 Pole, revolving field design
Exciter Brushless, shunt excited
Voltage Regulator Solid State, HZ/Volts
Voltage Regulation ½%, No load to full load
Frequency Field convertible, 60 HZ to 50 HZ
Frequency Regulation ± 2½% (3 cycle, no load to full load)
Unbalanced Load Capability 100% of standby amps
One Step Load Acceptance 100% of nameplate rating
Motor Starting 35% Dip on specific voltages
Total Stator and Load Insulation Class H, 180°C
Temperature Rise 130°C R/R, standby rating @ 30°C amb.
..... 105°C R/R, prime rating @ 30°C amb.
1 Ø Motor Starting @ 35% Voltage Dip 35 KVA
3 Ø Motor Starting @ 35% Voltage Dip 55 KVA
Bearing 1, Pre-lubed and sealed
Power Leads 12 Leads re-connectable for three phase
..... or 4 lead, dedicated winding for single phase
Coupling Direct flexible disc.
Total Harmonic Distortion Max 3½% (MIL-STD705B)
Telephone Interference Factor Max 50 (NEMA MG1-22)
Deviation Factor Max 5% (MIL-STD 405B)
Alternator Self ventilating and drip-proof
Ltd. Warranty 24 months or 1000 hrs., first to occur

GENERATOR FEATURES

- Full alternator protection with **SENTINEL “COMMAND”** controller, having UL-508 certification.
- Automatic voltage regulator with over-excitation, under-frequency compensation, under-speed protection, and EMI filtering. Entire solid-state board is encapsulated for moisture protection.
- Alternator power ratings are based on temperature rise, measured by resistance method, as defined in MIL-STD 705C and IEEE STD 115, Method 6.4.4.
- Power ratings will not exceed temperature rise limitation for class H insulation as per NEMA MG1-22.40.
- Insulation resistance to ground, exceeds 1.5 meg-ohm.
- Stator receives 2000 V. hi-potential test on main windings, and rotor windings receive a 1500 V. hi-potential test, as per MIL-STD 705B.
- Full amortisseur windings with UL-1446 listing on all alternators. Certain generators are UL 2200 certified.
- Complete engine-alternator torsional acceptance, confirmed during initial prototype testing.
- Full load testing on all engine-alternator sets, before shipping.

ENGINE SPECIFICATIONS AND APPLICATIONS DATA

ENGINE

Manufacturer Lombardini
Model and Type LDW1603, 4 cycle
Aspiration Natural
Cylinder Arrangement 3 Cylinders, In-Line, 4-cycle
Displacement Cu. In. (Liters) 100 (1.65)
Bore & Stroke In. (Cm.) 3.5 (8.8) & 3.6 (9.1)
Compression Ratio 22.0:1
Main Bearings & Style Tri-metallic
Cylinder Head Cast Iron
Pistons 3
Crankshaft Carbon Steel Full Balance
Exhaust Valve Heat Resisting Steel
Governor Centrifugal
Frequency Regulation ± 2-1/2%
Air Cleaner Dry, Replaceable Cartridge
Engine Speed 1800 rpm
Max Power, bhp (kwm) Standby 24.8 (18.5)
Max Power, bhp (kw) Prime 22.5 (16.8)
BMEP: psi (kpa) Standby 113 (780)
BMEP: psi (kpa) Prime 99 (679)
Ltd. Warranty Stage 1: parts and labor for 2 years or 1500 hrs.
Stage 2: parts only for 3rd year or 3000 hours, whichever occurs first.

FUEL SYSTEM

Type Diesel Fuel Oil (ASTM No. 2-D)
Combustion System Indirect Injection
Fuel Injection Pump Bosch Style
12 VDC Glo-Plugs Standard Equipment
Water Separator Yes

FUEL CONSUMPTION

GAL/HR (LITER/HR)	STANDBY	PRIME
100% LOAD	1.5 (5.6)	1.35 (5.12)
75% LOAD	1.0 (4.0)	0.9 (3.41)
50% LOAD	0.8 (3.0)	0.7 (2.65)

OIL SYSTEM

Type Full Pressure
Oil Pan Capacity qt. (L) 4 (3.8)
Oil Pan Cap. W/ filter qt. (L) 5 (4.7)
Oil Filter 1, Replaceable Spin-On

ELECTRICAL SYSTEM

Ignition System Electronic
Eng. Alternator and Starter:
Ground Negative
Volts DC 12
Max. Amp Output of Alternator 50
Recommended Battery to -18°C (0°F): 12 VDC, Size BCI# 48 or #91, Max Dimensions, ... 12 ¼" lg X 7" wi X 9" hi, with standard Round posts. Max output at 650 CCA. Battery holder, hold down straps, battery cables, and battery charger is furnished. Installation of (1) starting battery, is required.

CERTIFICATIONS

Engines are CARB, 97/68/CE Step 2, ECE R24-03 and EPA certified. All Stationary & Portable diesel engines are Tier III compliant.

STANDARD AND OPTIONAL FEATURES FOR MODEL SPDL-150-60 HZ

COOLING SYSTEM

Type of System	Pressurized, closed recovery
Coolant Pump	Pre-lubricated, self-sealing
Cooling Fan Type (no. of blades)	Pusher (6)
Fan Diameter inches (cm)	13.78" (35)
Ambient Capacity of Radiator °F (°C)	125 (52)
Engine Jacket Coolant Capacity Gal (L)	0.67 (2.5)
Radiator Coolant Capacity Gal. (L)	1.7 (6.5)
Engine Heat Reject. Btu/min. (kw)	1052 (18.5)

Water Pump Capacity gpm (L/min)	15 (55)
Heat Reject Coolant: Btu/min (kw) .	1052 (18.5)..... 1052 (18.5)
Note: Coolant temp. shutdown switch setting at 230°F (110°C) with 50/50 (water/antifreeze) mix.	

COOLING AIR REQUIREMENTS

Combustion Air cfm (m ³ /min)	2034 (58)
Heat Rejected to Ambient:	
Engine: kw (btu/min)	2.9 (165)
Alternator: kw (btu/min)	3.2 (196)

EXHAUST SYSTEM

Muffler Inlet – Outlet Size	1.5"
Max. Back Pressure hg	3"
Exhaust Flow, at rated cfm (m ³ /min)	127 (3.6)
Exhaust Temp., at rated °F (°C)	1000 (538)

SOUND LEVELS

	Open Set	Std. Encl.	Super-Silent Encl.
dB(A), Residential Muffler, no load	76.....	72	n/a
dB(A), Residential Muffler, full load.....	79.....	75	n/a
dB(A), Critical Muffler, no load	74.....	67	64
dB(A), Critical Muffler, full load.....	76.....	69	66

Note: Open sets (no enclosure) have loose flexible exhaust hose and loose residential muffler, ready for installation by others. Standard enclosure has installed residential muffler. Super-Silent enclosure has installed critical muffler. "Open" sets can be upgraded to critical muffler. Standard enclosure sets can be upgraded to critical muffler. Sound tests are averaged from several test points and taken at 23 ft. (7 m) from source of noise.

DERATE GENERATOR FOR ALTITUDE

3% per 1000 ft. (305m) above 3000 ft. (914m) from sea level

DERATE GENERATOR FOR TEMPERATURE

2% per 10°F (5.6°C) above 65°F (29.4°C)

DIMENSIONS AND WEIGHTS

	Open Set	Standard Enclosure	Super-Silent Enclosure
Length in (cm).....	52 (132).....	70 (178)	70(178)
Width in (cm).....	37 (94).....	37 (94)	37 (94)
Height in (cm)	35.5 (90).....	38 (97)	38 (97)
Net Weight lbs (kg).....	950 (431)....	1250 (567)	1350 (612)
Ship Weight lbs (kg)	1050 (477)...	1350 (612)	1450 (658)

SENTINEL COMMAND DIGITAL MICROPROCESSOR CONTROLLER



SENTINEL COMMAND

The "Command" controller is an auto start control module and the upgrade "Command Elite" controller is an auto mains (utility) failure, module, for single gen-set applications.

Both controllers include a backlit LCD display which continuously displays the status of engine and generator at all times. Both will also monitor speed, frequency, voltage, current, oil pressure, coolant temp., and fuel levels. These modules have been designed to display warning and shut down status. They also include: (6) digital inputs • (3) analog inputs • (6) outputs • voltage monitoring (utility mains included on "Command Elite") • (10) event logs • configurable timers • automatic shutdown or warning during fault detection via red LED indicators • remote start (on or off load) • engine preheat • advanced metering capability • hour meter • text LCD displays • protected solid state outputs • test buttons for: stop/reset • manual mode • auto mode • lamp test • start button.

This controller (installed on all generator models as standard equipment) can be accessed via PC laptop using any standard USB cable and downloadable software.



SENTINEL COMMAND ELITE CONTROLLERS :

The "Command Elite" controller is an auto-mains (utility) failure control module that has almost all the Sentinel "Command" controller features, plus the additional capability of

being able to monitor a mains (utility) power supply. It is also used where remote annunciation is required.

All controllers are simple to operate and feature a user friendly menu layout for improved clarity. Enhanced features include a real time clock, better event, and performance monitoring, plus Ethernet communications for lower cost monitoring.

STANDARD AND OPTIONAL FEATURES FOR MODEL SPLD-150-60 HZ

STANDARD FEATURES

CONTROL PANEL:

- SENTINEL "COMMAND" digital microprocessor with logic allows programming in the field. Controller has:
- STOP-MANUAL-AUTO modes and automatic engine shutdowns, signaled by full text LCD indicators:
 - Low oil pressure
 - High engine temp
 - Low Radiator Level
 - Three auxiliary alarms
 - Battery fail alarm
 - Engine fail to start
 - Engine over speed
 - Engine under speed
 - Over & under voltage
- Also included is tamper-proof engine hour meter

ENGINE:

- Fuel filter
- Full flow oil filter
- Air filter
- Fuel pump
- Oil pump
- Solenoid type starter motor
- Hi-temp radiator
- Jacket water pump
- Thermostat
- Pusher fan and guard
- Exhaust manifold
- Residential Silencer
- Mechanical Governor
- 12 VDC battery charging alternator
- Flexible fuel and exhaust connectors
- Vibration isolators
- Open coolant system with 50/50 water/antifreeze mixture
- flexible oil & radiator drain hose
- Water Separator

GENERATOR:

- AC generator
- Shunt excited
- Brushless design
- Single bearing
- Direct connection to engine with flex disc
- Class H, 180°C insulation
- Self ventilated
- Drip proof construction

VOLTAGE REGULATOR:

- 1% Voltage regulation
- EMI filter
- Under-speed protection
- Over-excitation protection
- Total encapsulation

ELECTRICAL:


- Battery tray
- Battery cables
- Battery hold down straps
- 2-stage battery float charger

SUPPORT:

- Operation, maintenance, and installation literature.
- Call 1-800-777-9639 or Fax 1-574-262-1840
- E-mail : engineering@gillettegenerators.com
- Web : www.gillettegenerators.com

ACCESSORY ITEMS

- Engine Coolant Heater with automatic 80°F on, 100°F off, thermostat
- Starting Battery Heater Blanket with automatic 60°F on, 80°F off, thermostat
- Battery Charger, float type, 12 VDC at max. charge, with ammeter.
- Radiator for dirty environment
- External Permanent Magnet Generator (PMG) for increased induction motor starting capacity, on 1Ø or 3Ø sets, and to meet NFPA-110 requirements.
- Exhaust Silencer (Critical Grade) installed on "OPEN" sets or standard housing.
- Circuit Breaker installed and wired on gen-set
- Circuit Breaker with NEMA-3R Enclosure. Note: These breakers are shipped loose for installation in remote outside area by others.
- e remote annunciation.
- All aluminum or stainless steel weather and sound deadening housing for coastal areas. (allow 8-10 weeks for special order)
- Double wall, Sub-Base Diesel Fuel Tanks with UL-142 certification.
- SENTINEL COMMAND ELITE Controller with all features of Sentinel COMMAND, plus allowing full telemetry remote control annunciation, and utility power monitoring.
- Remote Annunciator for up to (10) reporting functions. An additional relay expansion module, plus a second Annunciator adds another (10) reporting functions. Note: SENTINEL COMMAND ELITE must be selected, to achieve remote annunciation.

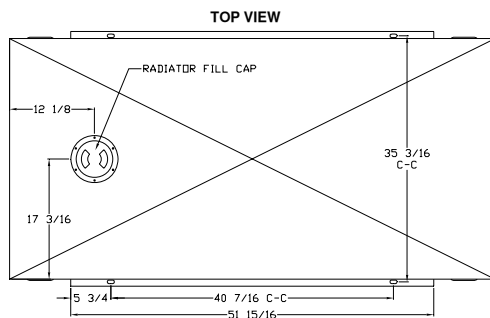

Design & specifications subject to change without prior notice. Dimensions shown are approximate. Contact Gillette for certified drawings.
DO NOT USE DIMENSIONS FOR INSTALLATION PURPOSES.

